


# PANDJIRIS, INC

5151 Northrup • St. Louis, MO 63110 • (314) 776-6893

## MINI PRO® WELDING POSITIONER 350 LB. CAPACITY

The **Mini Pro® Positioner** has a motorized variable speed rotation with Forward-Reverse switch, speed potentiometer and dynamic braking. The rotation speed is variable from 0.65 to 13 RPM with pinned tilt variable 15 degree increments. An 8" diameter three jaw chuck and 300 amp welding ground is standard. All wiring conforms to National Electrical Code Standards. The positioner operates on 115 volt, single phase, 60 cycle input power. The unit also includes an On/Off foot switch.

Load capacity . . . . . 350 lbs. Vertical, 350 lbs. Horizontal  
Rotation speed . . . . . Variable from 0.65 to 13 RPM.  
Maximum Swing Radius . . . . . 10 inches  
Tilt range . . . . . 0 through 90 degrees, pinned at 15 degree increments.  
Spindle Thru Hole . . . . . 2.5 inches  
Approx. Shipping Weight . . . . . 115 lbs.

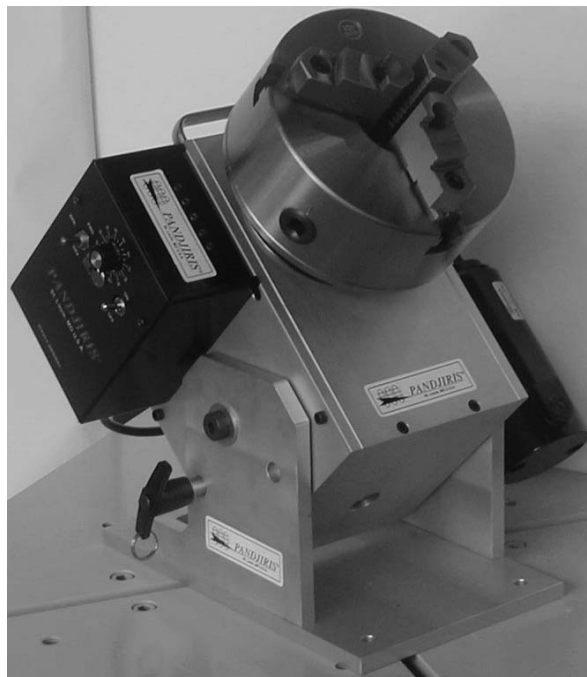

## **PANDJIRIS, INC**

5151 Northrup • St. Louis, MO 63110 • (314) 776-6893

### **OPTION**

The OS-3.5 is rated 350# for work 1" to 8" diameter. The 3" diameter rollers have 3 position adjustment points and the acme screw provides 3" of vertical adjustment

