

PANDJIRIS, INC

5151 Northrup • St. Louis, MO 63110 • (314) 776-6893

MINI PRO® WELDING POSITIONER 350 LB. CAPACITY

The **Mini Pro® Positioner** has a motorized variable speed rotation with Forward-Reverse switch, speed potentiometer and dynamic braking. The rotation speed is variable from 0.65 to 13 RPM with pinned tilt variable 15-degree increments. An 8" diameter three jaw chuck and 300-amp (100% Duty Cycle) welding ground is standard. All wiring conforms to National Electrical Code Standards. The positioner operates on 115-volt, single phase, 60 cycle input power. The unit also includes a momentary On/Off foot switch on 9' plug in cable.

Load capacity 350 lbs. Vertical, 350 lbs. Horizontal
Rotation speed Variable from 0.65 to 13 RPM.
Rotation Torque 175 in-lbs.
Rotation Motor Size..... 1/8 HP Gearmotor
Maximum Swing Radius..... 10 inches
Tilt range 0 through 90 degrees, pinned at 15-degree increments.
Spindle Thru Hole 2.5 inches
Approx. Shipping Weight..... 115 lbs.

Optional for Slow Speed (0.22 to 4.4 RPM)

Rotation Torque 175 in-lbs.
Rotation Motor Size..... 0.02 HP Gearmotor



PRICE LIST

For Bulletin No. : PC 0991
Effective Date : January, 2014


PANDJIRIS, INC

5151 Northrup • St. Louis, MO 63110 • (314) 776-6893

OPTIONS

For Variable Speed Foot Switch, with 11' Cable (Hard Wired)
Factory installed option only

The OS-3.5 is rated 350# for work 1" to 8" diameter. The 3" diameter rollers have
3 position adjustment points and the acme screw provides 3" of vertical adjustment

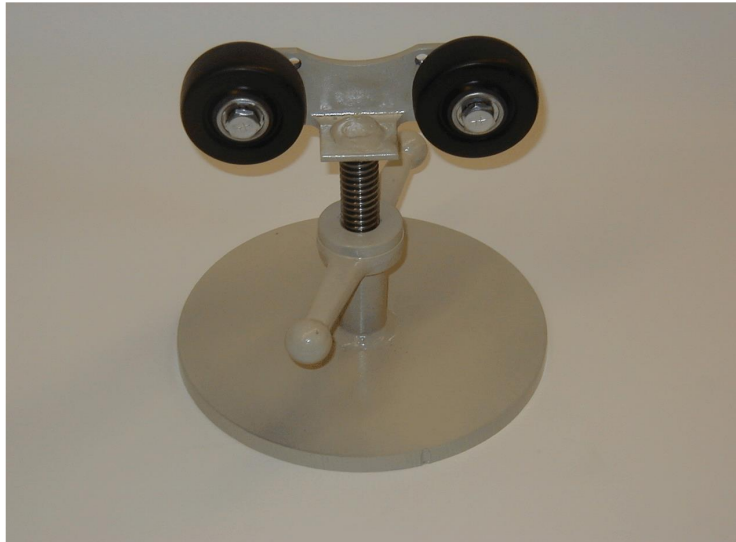

PRICE LIST

For Bulletin No. : PC 0991

Effective Date : January, 2014