MODEL PR-30/10 TURNING ROLL

The **Model PR-30/10 Turning Roll** has a capacity of 15 tons turning and 5 tons support. It features Pandjiris' exclusive torque-tube wheel design sealed bearings, alloy shafts, and totally enclosed fan cooled (TEFC) motors with electronic drives. It comes with field changeable plug-in hand pendants including "Forward-Stop-Reverse-Weld/Rapid" buttons and a speed adjustment potentiometer on 25' of cable. All "PR" models have electronic variable speed controls infinitely variable between a specified range. **The Rolls operate on 120 volt, single phase, 60 cycle input power.** All wiring conforms to National Electrical Code Standards.


Turning Capacity	30,000 lbs.
Tractive Effort	1,385 lbs.
Load Capacity	10,000 lbs.
Pipe Diameter Range	6" thru 15'
Speed Range	2.1 to 63.0 IPM
Motor Horse Power Rating	1.0 HP
Wheel Diameter	16"
Combined Wheel Face	4"

The Model IR-10 Idler Roll has 5 tons support capacity.

Weight Capacity of IR-10	10,000 lbs
Weight Capacity of (1) PR-30 with (1) IR-10	20,000 lbs
Weight Capacity of (1) PR-30 with (2) IR-10	.30,000 lbs

Α	Axle Height	11-3/8"
В	Wheel Height	19-3/8"
С	Wheel Diameter	16"
D	Spacing for Cylinder Ø 6" - 41"	19-1/2"
Е	Spacing for Cylinder Ø 30" - 87"	35"
F	Spacing for Cylinder Ø 50" - 132"	50-1/2"
G	Spacing for Cylinder Ø 100" - 15'	66"
Н	Overall Length of Power Roll	110"

I	Overall Width Power Roll	24"
J	Frame Width Power Roll	20"
K	Wheel Face	4"
L	Overall Length Idler Roll	90"
М	Axle Height	11-3/8"
N	Wheel Height	19-3/8"
0	Frame Width Idler Roll	20"

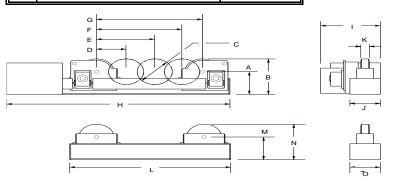

Terms: Pandjiris, Inc. standard terms and conditions apply, f.o.b. Factory, St. Louis, Missouri, or designated ship point.

Delivery: Consult Factory
Approximate shipping weight:
PR-30 950 lbs.
IR-10 400 lbs.

PRICE LIST

For Bulletin No. : PW-1274-A
Effective Date : Sept. 1, 2016
Page Number : C-19

PR SERIES TURNING ROLLS Optional Accessories

For steel wheels in place of rubber wheels,	Consult Factory
For foot switch with compatible plug for Forward/Stop/Reverse (speed potentiometer on	hand pendant)
For foot switch, Fast-Slow with compatible plug	
For preset digital tachometer with compatible plug reads speed in IPM or CmPM	
For 25' Extension Cable with compatible plugs for standard pendants and accessories	
For special voltages, PR-30/10 thru PR-100/34, Add	Consult Factory
For special voltages, PR-180/60 thru PR-270/90, Add	Consult Factory
For special voltages, PR-400/200 thru PR-480/120, Add	Consult Factory

PRICE LIST

For Bulletin No. : PW-1274-A Effective Date : January 2014 Number : C-20